



# Parkingstar II

## LED Luminaire


- Die cast aluminum housing
- Tool-less entry
- Various mounting options
- Equivalent performance of a 400watt Metal Halide
- 20,000 + Lumen package
- Dark Sky optics
- 4000 and 5500 Kelvin standard
- Various mounting options
- Dimming capable
- L70 Hours are 150,000 @ 350MA
- DLC Listed
- 5 Year Warranty

Every Day Style Fixture Meets New LED Lamp Technology!  
The popular ParkingStar II fixture from Visionaire Lighting is now available in LED! The LED ParkingtStar II offers the same great VALUE as previous versions of this fixture.

19645 Rancho Way . Rancho Dominguez, CA 90220  
310.512.6480 [www.VisionaireLighting.com](http://www.VisionaireLighting.com)

# ParkingStar II LED

## Dimensional Drawings

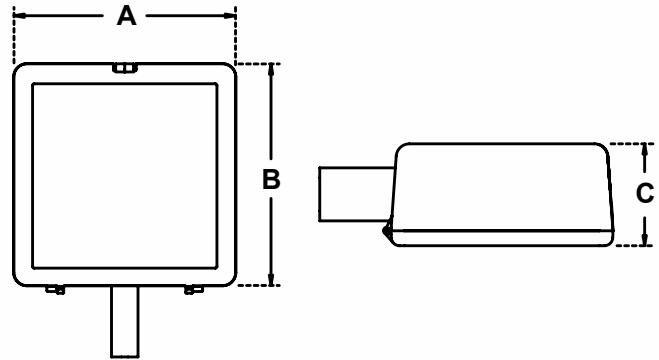

Fixture	A	B	C	Max. Watts	Lbs
PST-2-L	17"	17"	8"	228 L	46

The **Parking Star II** LED luminaire combines low-profile styling and sleek architectural lines with advanced LED technology. Maintenance-friendly engineering provides for tool-less entry for LED and driver access.

The compact, die cast aluminum housing features soft, rounded contours with stylish accents for a contemporary, upscale appearance. Durable polyester powder coat finish is available in a wide array of architectural colors.

The **ParkingStar II** utilizes our latest high-performance LED light engine; to provide IES Types I, II, III, IV, IV-A, V, and V-W distribution patterns. The **ParkingStar II** qualifies as an IES full cutoff fixture; and is Dark-Sky certified to restrict light trespass, glare and light pollution for neighborhood-friendly lighting

An economical LED luminaire that can be utilized as a pole mount, wall mount, flood light or ceiling mount fixture, the **ParkingStar II** is ideal for shopping centers, parking lots, street lighting and general area lighting.

Model	Optics	Source	Current	Kelvin	Voltage	Mounting	Finish	Options
<b>PST-2-L</b>	Type I (T1) 	<b># of LEDs</b> 24 (24LC)	<b>mA</b> 350 (3)	4000K *Neutral white (4K)	120-277 *Universal voltage (UNV)	Bolt-On Arm 6" (BOA6)	Bronze (BZ)	<u>Photocell &amp; Receptacle</u> <small>*Specify voltage</small> (PCR120) (PCR208) (PCR240) (PCR277) (PCR480)
	Type II (T2) 	48 (48LC)	530 (5)	5500K *Cool white (55K)	480 (5)	Bolt-On Arm 10" (BOA10)	Black (BK)	Photo Receptacle <small>*With shorting cap</small> (PER)
	Type III (T3) 	72 (72LC)	700 (7)		347 (8)	Wall Mount Cast Wall Plate (BAWP) to be ordered separately (WM)	White (WH)	<u>Button Type Photocell</u> <small>*Specify voltage</small> (PC120) (PC208) (PC240) (PC277)
	Type IV (T4) 	96 (96LC)				Knuckle Mount <small>*Slips over 2 3/8" Tenon with adjustable Increments of 10"</small> (KM)	Forest Green (FG)	Cutoff Louver System (CLS)
	Type IV-A (T4A) 						Grey (GY)	<u>Round Pole Plate Adaptor</u> For 4"Ø Pole (RPP4) For 5"Ø Pole (RPP5)
	Type V (T5) 						Silver Metallic (SL)	Dual Circuit (DC)
	Type V-W (T5W) 						Custom Color (CC)	Dimming/Controls <small>*Consult Factory</small>
							Unless specified, BOA6 will be supplied for S1 & D180 mounting. BOA10 supplied for all other mounting configurations.	Motion Sensor (MS)
							Round Pole Plate Adaptors (RPP) are to be ordered separately.	0-10 V Dimming Driver <small>*No controls</small> (DIM)
								10KV Surge Protector (10KV)

For more detailed information on mounting, wiring or installation instructions, please consult factory. If poles are not ordered with fixtures, please specify mounting requirements. This document contains proprietary information of Visionaire Lighting LLC. Any use of this information requires the written approval of Visionaire Lighting, LLC. In keeping with our TQM policy of continuous improvement, Visionaire reserves the right to change any specifications contained herein without prior notice.