

All installation work must be performed by a qualified, certified electrician.

Caution! Disconnect all power before installation.

BEFORE YOU BEGIN



- Read these instructions completely and carefully.
- Save these instructions for future use.



WARNING

To avoid possible risk of fire or shock turn off power prior to installation or maintenance preferably at circuit breaker. Product must be installed following all NEC and local Electrical Codes.

UNPACKING

- This luminaire has been properly packaged so that no damage shall occur during transportation.
- Inspect and confirm.

INSTALLATION

- Remove screw socket head cap (#10-24 x 5/8"). (Fig. 1)
- Disassemble mounting plate from bottom bracket. (Fig. 2)
- Secure mounting plate to ceiling junction box using hardware of your choice. Please refer to the drilling pattern drawing. (Fig. 3 & Fig. 4)

NOTES:

Not to scale, for reference only.

Luminaire model or components can vary.

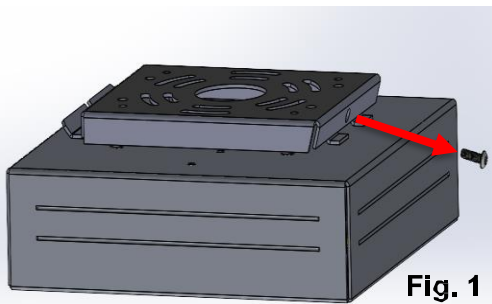


Fig. 1

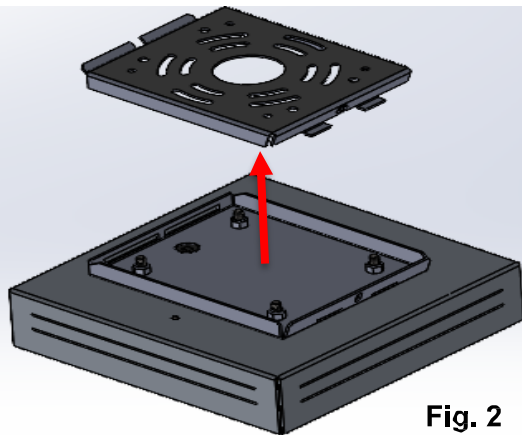


Fig. 2

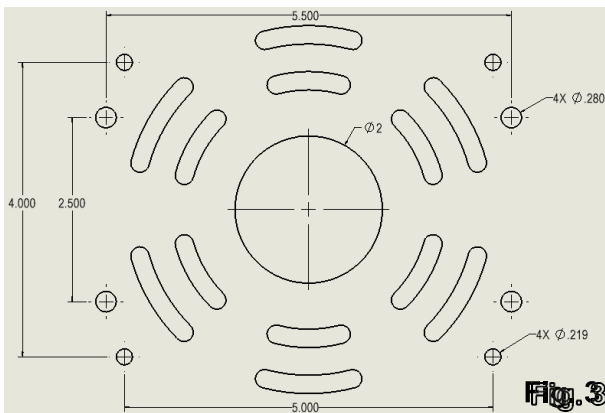


Fig. 3

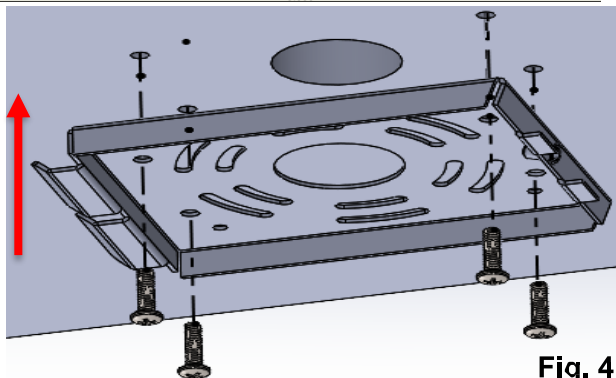


Fig. 4





INSTALLATION

- Route electrical wires from fixture through mounting plate hole to connect to power supply.
- Place the fixture on the mounting plate, by assembling the bottom bracket with the plate. (Fig. 5)
- Align the Ceiling Mount Brackets and fasten the (x3) screw socket head cap (#10-24 x 5/8") (tighten to 20 lbs-in). (Fig. 6)
- Final assembly (luminaire model can vary). (Fig. 7)

NOTES:

Not to scale, for reference only.

Luminaire model or components can vary.

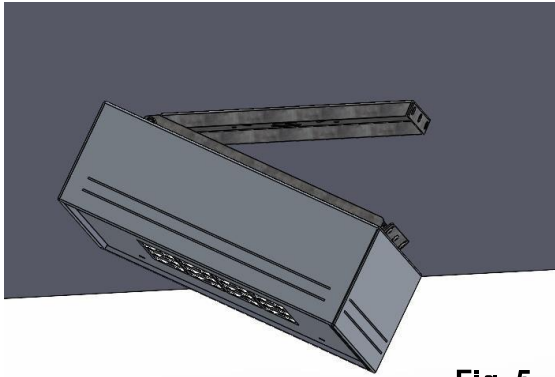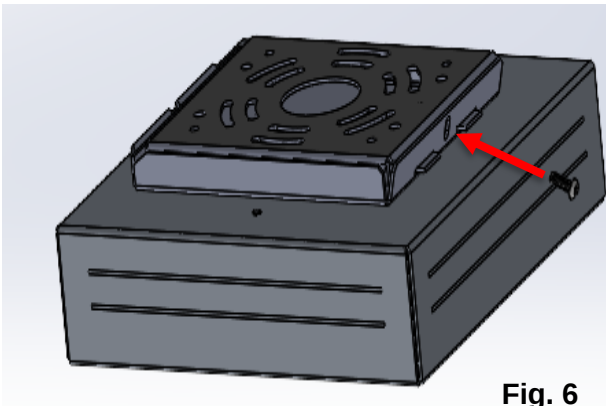**Fig. 5****Fig. 6****Fig. 7**