

VBL-2 LED Specifications

Architectural - Site - Outdoor



The V-Bollard LED Series continues the contemporary elegance and architectural styling that define the V-Collection. Engineered for performance, longevity, and design continuity, the V-Bollard separates the driver(s) from the precision die-cast aluminum LED light engines—enhancing thermal management, extending component life, and maximizing lumen output.

The modular LED assemblies are available in configurations of 16, 32, or 48 LEDs per single fixture, and 64 or 96 LEDs in a dual-fixture design—delivering powerful illumination tailored to each application. Available with 17 IES distribution patterns. Choose from 2700K, 3000K, 3500K, 4000K, or 5000K color temperatures and 70, 80, or 90 CRI options to achieve the ideal combination of visual comfort and architectural intent.

A durable polyester powder-coat finish, available in standard or custom colors, ensures lasting beauty and protection against the elements. The finish is backed by a five-year warranty, a testament to Visionaire Lighting's commitment to quality and durability.

The V-Bollard LED Series is an exceptional choice for low-level and pedestrian-scale lighting, combining modern aesthetics with superior optical performance for today's most refined outdoor environments.

Project Name:

Catalog Number:

Type:

Date:

Location:

MODEL	HEIGHT	OPTICS		SOURCE	CONFIG.	CURRENT
VBL-2	9 9'	T1 Type 1	T5 Type 5	16LD	S Single	3 350mA
		T2 Type 2	T5W Type 5 Wide	32LD		5 530mA
	10 10'	T3 Type 3	T5WW Type 5 Extra Wide	48LD		7 700mA
		T3R Type 3 Round	T5LG Type 5 Low Glare	32LD	D Double	10 1050mA
	11 11'	T3W Type 3 Wide	FN Flood Narrow	64LD		12 1200mA
	12 12'	T3LG Type 3 Low Glare	FM Flood Medium	96LD		
		T4 Type 4	FW Flood Wide	Double configuration only		
		T4A Type 4 Automotive				
		T4FT Type 4 Forward Throw				
		T4LG Type 4 Low Glare				
CCT	VOLTAGE	MOUNTING	FINISH	CONTROL OPTIONS	SHIELD OPTIONS	OPTIONS
27K7 27K8 27K9 2700K 70, 80, & 90 CRI	UNV 120-277V	AB Anchor Base (ANCHOR BOLT KIT SUPPLIED)	BZ Bronze	PC-120 PC-208 PC-240 PC-277 Button Type Photocell	CLS Backside cutoff shield	BBG Bird Spikes
30K7 30K8 30K9 3000K 70, 80, & 90 CRI	8 347V		BK Black		RCLS Rightside cutoff shield	GFI GFI Receptacle *Standard location is in hand hole.
35K7 35K8 35K9 3500K 70, 80, & 90 CRI	5 480V		GY Grey	DIM 0-10v Dimming Driver	LCLS Leftside cutoff shield	*Specify GFI location if different from hand hole location. Supplied with in use cover.
40K7 40K8 40K9 4000K 70, 80, & 90 CRI			SBK Smooth Black	DTO Dim To Off	BHS House shield	USB USB Receptacle *Specify location. Supplied with in use cover.
50K7 50K8 50K9 5000K 70, 80, & 90 CRI			WH White			BAA Buy America(n) Act Compliant
			SWH Smooth White			
			GP Graphite			
			GY Grey			
			SL Silver Metallic			
			ZFP Zinc-Free Primer Coat			
			CC Custom Color			

Housing

Cast aluminum heatsink with integral cooling fins for thermal management. The 4" extruded pole contains the driver(s), allowing for cooler operation and longer life. Silicone gasketing is utilized throughout the fixture for weather tight operation.

Thermal Management

- The V-Bollard Series provides excellent overall thermal management by maximizing the fixture's heatsink capabilities. This enables the V-Bollard Series to withstand higher ambient temperatures and drive currents without degrading LED life. The V-Bollard Series has a very low thermal resistance rating.
- The L70 test determines the point in an LEDs life when it reaches 70 percent of its initial output. The V-Bollard Series LEDs have been determined to last a minimum of 100,000 hours in 25° C environments when driven at 350 mA.

Optical System

- The highest lumen output LEDs are utilized in the V-Bollard Series. Available with 17 IES distribution patterns. The optical system qualifies as IES full cutoff to restrict light trespass, glare and light pollution.
- CCT values are 2700, 3000, 3500, 4000 or 5000K. LED light assemblies come in multiples of 16 LEDs.
- CRI values are 70, 80 or 90

Quali-Guard® Finish

- The finish is a Quali-Guard® textured, chemically pretreated through a multiple-stage washer, electrostatically applied, thermoset polyester powder coat finish, with a minimum of 3-5 mils thickness. Finish is oven-baked at 400° F to promote maximum adherence and finish hardness.
- All finishes are available in standard and custom colors.
- Finish is guaranteed for five (5) years

Mounting

The V-Bollard Luminaire is easily attached to the pole by 2 tamper-proof countersunk screws.

Electrical Assembly

- The V-Bollard LED series is supplied with a choice of 350, 530, 700, 1050 or 1200mA high-performance LED drivers that accept 120v, 50 Hz to 60 Hz, input.
- Power factor of 90%.
- Rated for -40°C operations.
- 10 kV surge protector supplied as standard.

Warranty

- Five (5) year Limited Warranty on electrical components
 - Five (5) year on finish.
- For full warranty information, please visit visionairelighting.com.

Options

- Button Type Photocell
- 0-10v Dimming Driver


Listings

- The V-Bollard is cUL Listed, suitable for wet locations.
- IP-65 Rated
- Powder Coated Tough.
- IDA Certification




3000K or lower must be selected for IDA certification.

Photometric Optical Summary



Dimensions

Width:	VBL-2 10.5"
Height:	VBL-2 4"
Depth:	VBL-2 14.5"/25"
Weight:	VBL-2 27/40 LBS

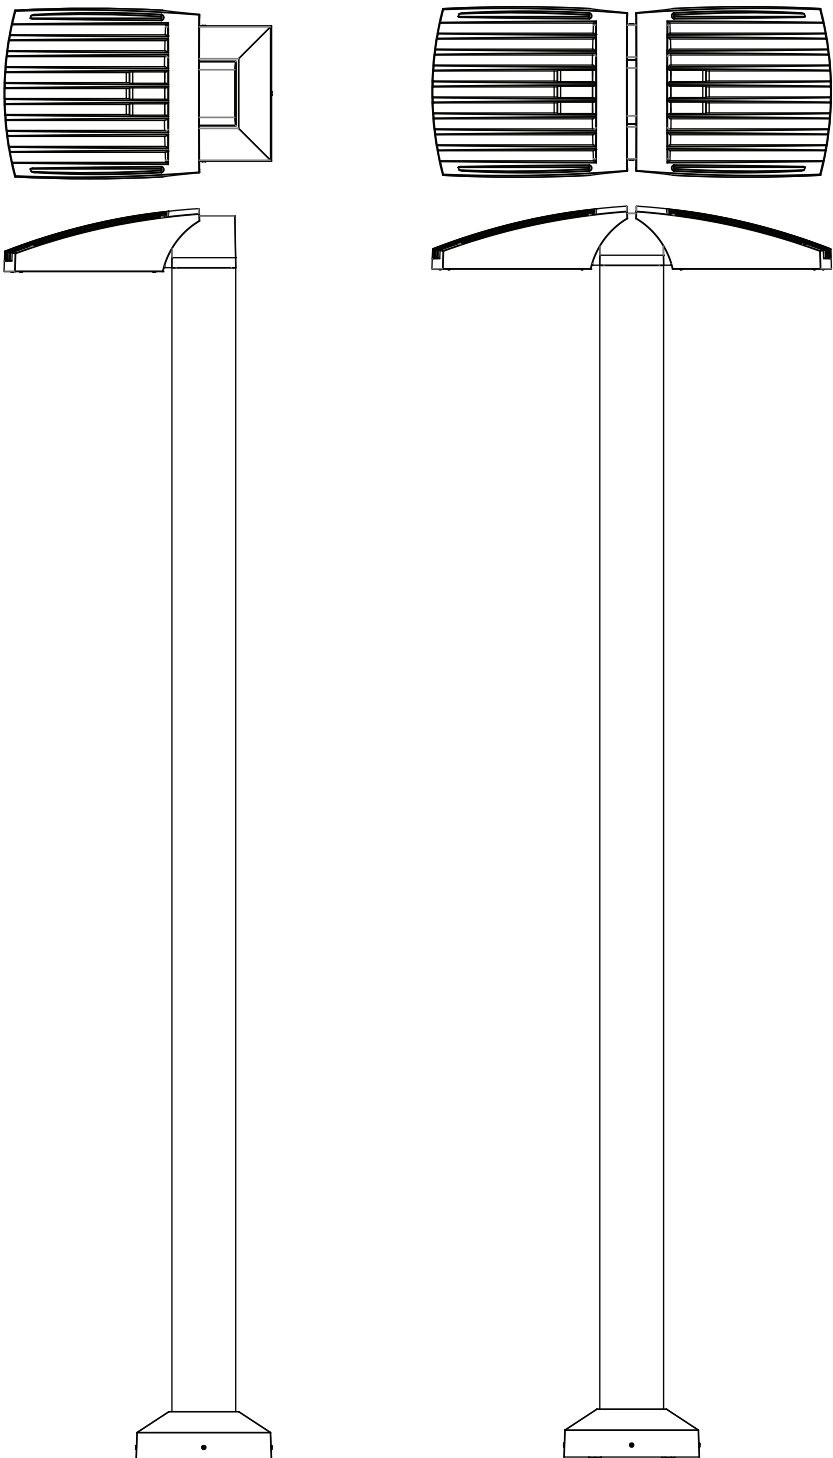

VBL-2 LED SPECIFICATIONS / Forward Optics																												
Led Count	CONFIG	Current & Watts	Distribution Type	70CRI																								
				27K					30K					35K					40K					50K				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
16LD	S	350 mA (16.4W)	T1	2571	2	0	2	156	2682	2	0	2	163	2682	2	0	2	163	2654	2	0	2	162	2794	2	0	2	170
			T2	2478	1	0	1	151	2586	1	0	1	157	2586	1	0	1	157	2559	1	0	1	156	2694	1	0	1	164
			T3R	2558	1	0	1	156	2669	1	0	1	162	2669	1	0	1	162	2642	1	0	1	161	2781	1	0	1	169
			T3	2524	1	0	1	154	2634	1	0	1	160	2634	1	0	1	160	2604	1	0	1	159	2744	1	0	1	167
			T3W	2554	1	0	1	155	2665	1	0	1	162	2665	1	0	1	162	2637	1	0	1	160	2776	1	0	1	169
			T3LG	2585	1	0	1	156	2677	1	0	1	163	2677	1	0	1	163	2649	1	0	1	161	2788	1	0	1	170
			T4	2524	1	0	1	154	2633	1	0	1	160	2633	1	0	1	160	2606	1	0	1	159	2743	1	0	1	167
			T4A	2660	1	0	1	162	2775	1	0	1	169	2775	1	0	1	169	2747	1	0	1	167	2891	1	0	1	176
			T4LG	2560	2	0	2	156	2672	2	0	2	163	2672	2	0	2	163	2644	2	0	2	161	2783	2	0	2	169
			T4FT	2598	1	0	1	158	2711	1	0	1	165	2711	1	0	1	165	2683	1	0	1	163	2824	1	0	1	172
			T5	2557	1	0	1	156	2668	1	0	1	162	2668	1	0	1	162	2640	1	0	1	161	2779	1	0	1	169
			T5LG	2583	1	0	1	157	2695	1	0	1	164	2695	1	0	1	164	2667	1	0	1	162	2808	1	0	1	171
			TSW	2456	1	0	1	149	2562	1	0	1	156	2562	1	0	1	156	2536	1	0	1	154	2669	2	0	2	162
			TSWW	2322	1	0	1	141	2423	2	0	2	147	2423	2	0	2	147	2398	2	0	2	146	2524	2	0	2	154
			FN	2188	2	0	1	133	2283	2	0	1	139	2283	2	0	1	139	2259	2	0	1	137	2378	2	0	1	145
			FM	2228	2	0	1	136	2325	2	0	1	141	2325	2	0	1	141	2301	2	0	1	140	2422	2	0	1	147
			FW	2505	1	0	1	152	2614	1	0	1	159	2614	1	0	1	159	2586	1	0	1	157	2722	1	0	1	166
16LD	S	530 mA (25.3W)	T1	3805	2	0	2	150	3970	2	0	2	157	3970	2	0	2	157	3929	2	0	2	155	4135	2	0	2	163
			T2	3668	1	0	2	145	3828	1	0	2	151	3828	1	0	2	151	3788	1	0	2	149	3987	1	0	2	157
			T3R	3786	1	0	2	149	3951	1	0	2	156	3951	1	0	2	156	3910	1	0	2	154	4115	1	0	2	162
			T3	3736	1	0	1	147	3896	1	0	1	154	3896	1	0	1	154	3858	1	0	1	152	4061	1	0	1	160
			T3W	3780	1	0	1	149	3944	1	0	1	156	3944	1	0	1	156	3903	1	0	1	154	4108	1	0	1	162
			T3LG	3797	1	0	1	150	3962	1	0	1	156	3962	1	0	1	156	3921	1	0	1	155	4127	1	0	1	163
			T4	3735	1	0	1	147	3897	1	0	1	154	3897	1	0	1	154	3857	1	0	1	152	4060	1	0	1	160
			T4A	3937	1	0	1	155	4108	1	0	1	162	4108	1	0	1	162	4065	1	0	1	160	4279	1	0	1	169
			T4LG	3789	2	0	2	150	3954	2	0	2	156	3954	2	0	2	156	3913	2	0	2	154	4119	2	0	2	163
			T4FT	3845	1	0	1	152	4012	1	0	2	158	4012	1	0	2	158	3971	1	0	1	157	4180	1	0	2	165
			T5	3784	2	0	2	149	3948	2	0	2	156	3948	2	0	2	156	3907	2	0	2	154	4113	2	0	2	162
			T5LG	3823	2	0	2	151	3989	2	0	2	157	3989	2	0	2	157	3948	2	0	2	156	4155	2	0	2	164
			TSW	3635	2	0	2	143	3793	2	0	2	150	3793	2	0	2	150	3753	2	0	2	148	3951	2	0	2	156
			TSWW	3436	2	0	2	136	3586	2	0	2	141	3586	2	0	2	141	3548	2	0	2	140	3735	2	0	2	147
			FN	3238	2	0	1	128	3379	2	0	1	133	3379	2	0	1	133	3344	2	0	1	132	3520	2	0	1	139
			FM	3297	2	0	1	130	3441	2	0	1	136	3441	2	0	1	136	3405	2	0	1	134	3584	2	0	1	141
			FW	3707	2	0	1	146	3868	2	0	1	153	3868	2	0	1	153	3828	2	0	1	151	4029	2	0	1	159
16LD	S	700 mA (34.0W)	T1	4931	3	0	3	145	5146	3	0	3	151	5146	3	0	3	151	5092	3	0	3	150	5360	3	0	3	158
			T2	4754	1	0	2	140	4961	1	0	2	146	4961	1	0	2	146	4910	1	0	2	145	5168	1	0	2	152
			T3R	4908	1	0	2	144	5121	1	0	2	151	5121	1	0	2	151	5068	1	0	2	149	5334	1	0	2	157
			T3	4843	1	0	1	143	5053	1	0	1	149	5053	1	0	1	149	5000	1	0	1	147	5264	1	0	1	155
			T3W	4899	1	0	2	144	5112	1	0	2	150	5112	1	0	2	150	5059	1	0	2	149	5325	1	0	2	157
			T3LG	4921	1	0	1	145	5135	1	0	1	151	5135	1	0	1	151	5082	1	0	1	150	5349	1	0	1	157
			T4	4841	1	0	1	143	5052	1	0	1	149	5052	1	0	1	149	4999	1	0	1	147	5262	1	0	1	155
			T4A	5103	1	0	1	150	5325	1	0	1	157	5325	1	0	1	157	5269	1	0	1	155	5546	1	0	1	163
			T4LG	4912	3	0	3	145	5125	3	0	3	151	5125	3	0	3	151	5072	3	0	3	149	5339	3	0	3	157
			T4FT	4984	1	0	2	147	5201	1	0	2	153	5201	1	0	2	153	5147	1	0	2	152	5418	1	0	2	159
			T5	4905	2	0	2	144	5118	2	0	2	151	5118	2	0	2	151	5064	2	0	2	149	5331	2	0	2	157
			T5LG	4955	2	0	2	146	5171	2	0	2	152	5171	2	0	2	152	5117	2	0	2	151	5386	2	0	2	159
			TSW	4711	2	0	2	139	4916	2	0	2	145	4916	2	0	2	145	4865	2	0	2	143	5121	2	0	2	151
			TSWW	4454	2	0	2	131	4648	3	0	3	137	4648	3	0	3	137	4599	2	0	2	135	4842	3	0	3	143
			FN	4197	3	0	1	124	4380	3	0	1	129	4380	3	0	1	129	4334	3	0	1	128	4562	3	0	1	134
			FM	4274	3	0	1	126	4460	3	0	1	131	4460	3	0	1	131	4414	3	0	1	130	4646	3	0	1	137
			FW	4805	2	0	1	141	5014	2	0	1	148	5014	2	0	1	148	4962	2	0	1	146	5223	2	0	1	154
16LD	S	1050 mA (52.4W)	T1	6888	3	0	3	131	7188	3	0	3	137	7188	3	0	3	137	7113	3	0	3	136	7487	3	0	3	143
			T2	6641	2	0	2	127	6930	2	0	2	132	6930	2	0	2	132	6858	2	0	2	131	7219	2	0	2	138
			T3R	6855	2	0	2	131	7153	2	0	3	137	7153	2	0	3	137	7079	2	0	3	135	7451	2	0	3	142
			T3	6764	1	0	2	129	7058	1	0	2	135	7058	1	0	2	135	6985	1	0	2	133	7352	1	0	2	140
			T3W	6843	1	0	2	131	7141	1	0	2	136	7141	1	0	2	136	7066	1	0	2	135	7438	1	0	2	142
			T3LG	6874	1	0	2	131	7173	1	0	2	137	7173	1	0	2	137	7098	1	0	2	135	7472	1	0	2	143
			T4	6762	2	0	2	129	7057	2	0	2	135	7057	2	0	2	135	6983	2	0	2	133	7351	2	0	2	140
			T4A	7128	1	0	1	136	7437	1	0	1	142	7437	1	0	1	142	7360	1	0	1	140	7747	1	0	1	148
			T4LG	6861	3	0	3	131	7159	3	0	3	137	7159	3	0	3	137	7084	3	0	3	135	7457	3	0	3	142
			T4FT	6962	1	0	2	133	7265	1	0	2	139	7265	1	0	2	139	7189	1	0	2	137	7567	1	0	2	144
			T5	6851	3	0	3																					

VBL-2 LED SPECIFICATIONS / Forward Optics																												
Led Count	CONFIG	Current & Watts	Distribution Type																									
				27K				30K				70CRI				35K				40K				50K				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
32LD	S	350 mA (32.9W)	T1	5037	3	0	3	153	5256	3	0	3	160	5256	3	0	3	160	5201	3	0	3	158	5475	3	0	3	167
			T2	4856	1	0	2	148	5067	1	0	2	154	5067	1	0	2	154	5015	1	0	2	153	5278	1	0	2	161
			T3R	5013	1	0	2	153	5231	1	0	2	159	5231	1	0	2	159	5176	1	0	2	157	5448	1	0	2	166
			T3	4946	1	0	1	150	5161	1	0	1	157	5161	1	0	1	157	5107	1	0	1	155	5376	1	0	1	164
			T3W	5004	1	0	2	152	5221	1	0	2	159	5221	1	0	2	159	5167	1	0	2	157	5439	1	0	2	165
			T3LG	5026	1	0	1	153	5245	1	0	1	160	5245	1	0	1	160	5190	1	0	1	158	5464	1	0	1	166
			T4	4945	1	0	1	150	5160	1	0	1	157	5160	1	0	1	157	5106	1	0	1	155	5375	1	0	1	164
			T4A	5212	1	0	1	159	5438	1	0	1	165	5438	1	0	1	165	5382	1	0	1	164	5665	1	0	1	172
			T4LG	5017	3	0	3	153	5235	3	0	3	159	5235	3	0	3	159	5180	3	0	3	158	5453	3	0	3	166
			T4FT	5091	3	0	1	155	5312	3	0	1	162	5312	3	0	1	162	5257	3	0	1	160	5533	3	0	1	168
			T5	5009	2	0	2	152	5227	2	0	2	159	5227	2	0	2	159	5173	2	0	2	157	5445	2	0	2	166
			T5LG	5061	2	0	2	154	5281	2	0	2	161	5281	2	0	2	161	5226	2	0	2	159	5501	2	0	2	167
			T5W	4812	2	0	2	146	5021	2	0	2	153	5021	2	0	2	153	4969	2	0	2	151	5230	3	0	3	159
			T5WW	4549	2	0	2	138	4747	3	0	3	144	4747	3	0	3	144	4698	3	0	3	143	4945	3	0	3	150
			FN	4287	3	0	1	130	4474	3	0	1	136	4474	3	0	1	136	4427	3	0	1	135	4660	3	0	1	142
			FM	4366	3	0	1	133	4555	3	0	1	139	4555	3	0	1	139	4508	3	0	1	137	4745	3	0	1	144
			FW	4908	2	0	1	149	5121	2	0	1	156	5121	2	0	1	156	5068	2	0	1	154	5334	2	0	1	162
32LD	S	530 mA (50.7W)	T1	7455	3	0	3	147	7779	3	0	3	153	7779	3	0	3	153	7698	3	0	3	152	8103	3	0	3	160
			T2	7187	2	0	3	142	7500	2	0	3	148	7500	2	0	3	148	7422	2	0	3	146	7812	2	0	3	154
			T3R	7419	2	0	3	146	7741	2	0	3	153	7741	2	0	3	153	7661	2	0	3	151	8064	2	0	3	159
			T3	7320	1	0	2	144	7639	1	0	2	151	7639	1	0	2	151	7559	1	0	2	149	7957	1	0	2	157
			T3W	7406	1	0	2	146	7728	1	0	2	152	7728	1	0	2	152	7647	1	0	2	151	8050	1	0	2	159
			T3LG	7439	1	0	2	147	7763	2	0	2	153	7763	2	0	2	153	7682	2	0	2	152	8086	2	0	2	160
			T4	7319	2	0	2	144	7637	2	0	2	151	7637	2	0	2	151	7557	2	0	2	149	7955	2	0	2	157
			T4A	7714	1	0	1	152	8049	1	0	1	159	8049	1	0	1	159	7965	1	0	1	157	8394	1	0	1	165
			T4LG	7425	3	0	3	146	7748	3	0	3	153	7748	3	0	3	153	7667	3	0	3	151	8070	3	0	3	159
			T4FT	7535	3	0	2	149	7862	3	0	2	155	7862	3	0	2	155	7780	3	0	2	153	8190	3	0	2	162
			T5	7414	3	0	3	146	7737	3	0	3	153	7737	3	0	3	153	7656	3	0	3	151	8059	3	0	3	159
			T5LG	7491	3	0	3	148	7816	3	0	3	154	7816	3	0	3	154	7735	3	0	3	153	8142	3	0	3	161
			T5W	7122	3	0	3	141	7431	3	0	3	147	7431	3	0	3	147	7354	3	0	3	145	7741	3	0	3	153
			T5WW	6733	3	0	3	133	7026	3	0	3	139	7026	3	0	3	139	6953	3	0	3	137	7319	3	0	3	144
			FN	6345	3	0	1	125	6621	3	0	1	131	6621	3	0	1	131	6552	3	0	1	129	6897	3	0	1	136
			FM	6461	3	0	1	127	6742	3	0	1	133	6742	3	0	1	133	6672	3	0	1	132	7023	3	0	1	139
			FW	7264	2	0	1	143	7579	2	0	1	150	7579	2	0	1	150	7501	2	0	1	148	7895	2	0	1	156
32LD	S	700 mA (67.9W)	T1	9663	3	0	3	142	10083	3	0	3	148	10083	3	0	3	148	9978	3	0	3	147	10503	3	0	3	155
			T2	9316	2	0	3	137	9721	2	0	3	143	9721	2	0	3	143	9620	2	0	3	142	10126	2	0	3	149
			T3R	9616	2	0	3	142	10034	2	0	3	148	10034	2	0	3	148	9930	2	0	3	146	10452	2	0	3	154
			T3	9489	1	0	2	140	9901	1	0	2	146	9901	1	0	2	146	9798	1	0	2	144	10314	2	0	2	152
			T3W	9599	1	0	2	141	10017	2	0	3	147	10017	2	0	3	147	9912	2	0	3	146	10434	2	0	3	154
			T3LG	9643	2	0	2	142	10062	2	0	2	148	10062	2	0	2	148	9957	2	0	2	147	10481	2	0	2	154
			T4	9486	2	0	2	140	9899	2	0	2	146	9899	2	0	2	146	9796	2	0	2	144	10311	2	0	2	152
			T4A	9998	2	0	1	147	10433	2	0	1	154	10433	2	0	1	154	10324	2	0	1	152	10868	2	0	1	160
			T4LG	9624	3	0	3	142	10042	3	0	3	148	10042	3	0	3	148	9938	3	0	3	146	10461	3	0	3	154
			T4FT	9766	3	0	2	144	10191	3	0	2	150	10191	3	0	2	150	10065	3	0	2	148	10615	3	0	2	156
			T5	9610	3	0	3	141	10028	3	0	3	148	10028	3	0	3	148	9924	3	0	3	146	10446	3	0	3	154
			T5LG	9709	3	0	3	143	10131	3	0	3	149	10131	3	0	3	149	10026	3	0	3	148	10553	3	0	3	155
			T5W	9231	3	0	3	136	9632	3	0	3	142	9632	3	0	3	142	9532	3	0	3	140	10034	3	0	3	148
			T5WW	8728	3	0	3	128	9107	3	0	3	134	9107	3	0	3	134	9012	3	0	3	133	9487	3	0	3	140
			FN	8225	3	0	1	121	8582	3	0	1	126	8582	3	0	1	126	8493	3	0	1	125	8940	3	0	1	132
			FM	8375	3	0	1	123	8739	3	0	1	129	8739	3	0	1	129	8648	3	0	1	127	9103	3	0	1	134
			FW	9415	3	0	1	139	9824	3	0	1	145	9824	3	0	1	145	9722	3	0	1	143	10234	3	0	1	151
32LD	S	1050 mA (104.8W)	T1	13497	4	0	4	129	14084	4	0	4	134	14084	4	0	4	134	13937	4	0	4	133	14671	4	0	4	140
			T2	13013	3	0	3	124	13579	3	0	3	130	13579	3	0	3	130	13437	3	0	3	128	14145	3	0	3	135
			T3R	13432	3	0	3	128	14016	3	0	3	134	14016	3	0	3	134	13870	3	0	3	132	14600	3	0	3	139
			T3	13254	2	0	2	126	13830	2	0	2	132	13830	2	0	2	132	13686	2	0	2	131	14406	2	0	2	137
			T3W	13408	2	0	3	128	13991	2	0	3	134	13991	2	0	3	134	13846	2	0	3	132	14574	2	0	3	139
			T3LG	13469	2	0	2	129	14055	2	0	2	134	14055	2	0	2	134	13909	2	0	2	133	14641	2	0	2	140
			T4	13251	3	0	3	126	13827	3	0	3	132	13827	3	0	3	132	13683	3	0	3	131	14403	3	0	3	137
			T4A	13966	2	0	2	133	14573	2	0	2	139	14573	2	0	2	139	14421	2	0	2	138	15180	2	0	2	145
			T4LG	13443	4	0																						

VBL-2 LED SPECIFICATIONS / Forward Optics																												
Led Count	CONFIG	Current & Watts	Distribution Type	70CRI																								
				27K					30K					35K					40K					50K				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
48LD	S	350 mA (49.3W)	T1	6996	3	0	3	142	7301	3	0	3	148	7301	3	0	3	148	7225	3	0	3	147	7605	3	0	3	154
			T2	6745	2	0	2	137	7039	2	0	3	143	7039	2	0	3	143	6965	2	0	2	141	7332	2	0	3	149
			T3R	6963	2	0	2	141	7265	2	0	3	147	7265	2	0	3	147	7190	2	0	3	146	7568	2	0	3	154
			T3	6870	1	0	2	139	7169	1	0	2	145	7169	1	0	2	145	7094	1	0	2	144	7468	1	0	2	151
			T3W	6950	1	0	2	141	7253	1	0	2	147	7253	1	0	2	147	7177	1	0	2	146	7555	1	0	2	153
			T3LG	6982	1	0	2	142	7286	1	0	2	148	7286	1	0	2	148	7210	1	0	2	146	7589	2	0	2	154
			T4	6869	2	0	2	139	7167	2	0	2	145	7167	2	0	2	145	7093	2	0	2	144	7466	2	0	2	151
			T4A	7239	1	0	1	147	7554	1	0	1	153	7554	1	0	1	153	7476	1	0	1	152	7869	1	0	1	160
			T4LG	6968	3	0	3	141	7271	3	0	3	147	7271	3	0	3	147	7196	3	0	3	146	7574	3	0	3	154
			T4FT	7071	1	0	2	143	7379	1	0	2	150	7379	1	0	2	150	7302	1	0	2	148	7686	1	0	2	156
			T5	6958	3	0	3	141	7261	3	0	3	147	7261	3	0	3	147	7185	3	0	3	146	7563	3	0	3	153
			T5LG	7030	2	0	2	143	7336	2	0	2	149	7336	2	0	2	149	7259	2	0	2	147	7641	3	0	3	155
			T5W	6684	3	0	3	136	6974	3	0	3	141	6974	3	0	3	141	6902	3	0	3	140	7265	3	0	3	147
			T5WW	6319	3	0	3	128	6594	3	0	3	134	6594	3	0	3	134	6526	3	0	3	132	6869	3	0	3	139
			FN	5955	3	0	1	121	6214	3	0	1	126	6214	3	0	1	126	6149	3	0	1	125	6473	3	0	1	131
			FM	6064	3	0	1	123	6328	3	0	1	128	6328	3	0	1	128	6262	3	0	1	127	6591	3	0	1	134
			FW	6817	2	0	1	138	7113	2	0	1	144	7113	2	0	1	144	7039	2	0	1	143	7410	2	0	1	150
48LD	S	530 mA (76.0W)	T1	10355	3	0	3	136	10805	3	0	3	142	10805	3	0	3	142	10693	3	0	3	141	11256	4	0	4	148
			T2	9984	2	0	3	131	10418	2	0	3	137	10418	2	0	3	137	10309	2	0	3	136	10852	2	0	3	143
			T3R	10305	2	0	3	136	10753	2	0	3	141	10753	2	0	3	141	10641	2	0	3	140	11201	2	0	3	147
			T3	10169	2	0	2	134	10611	2	0	2	140	10611	2	0	2	140	10500	2	0	2	138	11053	2	0	2	145
			T3W	10287	2	0	3	135	10734	2	0	3	141	10734	2	0	3	141	10623	2	0	3	140	11182	2	0	3	147
			T3LG	10334	2	0	2	136	10783	2	0	2	142	10783	2	0	2	142	10671	2	0	2	140	11232	2	0	2	148
			T4	10166	2	0	2	134	10608	2	0	2	140	10608	2	0	2	140	10498	2	0	2	138	11050	2	0	2	145
			T4A	10715	2	0	1	141	11181	2	0	1	147	11181	2	0	1	147	11064	2	0	1	146	11647	2	0	1	153
			T4LG	10313	3	0	3	136	10762	4	0	4	142	10762	4	0	4	142	10650	4	0	4	140	11210	4	0	4	147
			T4FT	10466	2	0	3	138	10921	2	0	3	144	10921	2	0	3	144	10807	2	0	3	142	11376	2	0	3	150
			T5	10299	3	0	3	135	10747	3	0	3	141	10747	3	0	3	141	10635	3	0	3	140	11194	3	0	3	147
			T5LG	10405	3	0	3	137	10857	3	0	3	143	10857	3	0	3	143	10744	3	0	3	141	11310	3	0	3	149
			T5W	9892	3	0	3	130	10323	3	0	3	136	10323	3	0	3	136	10215	3	0	3	134	10753	3	0	3	141
			T5WW	9353	3	0	3	123	9760	3	0	3	128	9760	3	0	3	128	9658	3	0	3	127	10166	3	0	3	134
			FN	8814	3	0	1	116	9197	3	0	1	121	9197	3	0	1	121	9101	3	0	1	120	9580	4	0	1	126
			FM	8975	3	0	1	118	9365	3	0	1	123	9365	3	0	1	123	9268	3	0	1	122	9755	3	0	1	128
			FW	10090	3	0	1	133	10528	3	0	2	138	10528	3	0	2	138	10419	3	0	1	137	10967	3	0	2	144
48LD	S	700 mA (101.9W)	T1	13422	4	0	4	132	14006	4	0	4	137	14006	4	0	4	137	13860	4	0	4	136	14589	4	0	4	143
			T2	12941	3	0	3	127	13503	3	0	3	132	13503	3	0	3	132	13363	3	0	3	131	14066	3	0	3	138
			T3R	13357	3	0	3	131	13938	3	0	3	137	13938	3	0	3	137	13793	3	0	3	135	14519	3	0	3	142
			T3	13180	2	0	2	129	13753	2	0	2	135	13753	2	0	2	135	13610	2	0	2	134	14326	2	0	3	141
			T3W	13334	2	0	3	131	13914	2	0	3	137	13914	2	0	3	137	13769	2	0	3	135	14493	2	0	3	142
			T3LG	13394	2	0	2	131	13977	2	0	2	137	13977	2	0	2	137	13831	2	0	2	136	14559	2	0	2	143
			T4	13177	3	0	3	129	13750	3	0	3	135	13750	3	0	3	135	13607	3	0	3	134	14323	3	0	3	141
			T4A	13888	2	0	2	136	14492	2	0	2	142	14492	2	0	2	142	14341	2	0	2	141	15096	2	0	2	148
			T4LG	13368	4	0	4	131	13949	4	0	4	137	13949	4	0	4	137	13804	4	0	4	135	14530	4	0	4	143
			T4FT	13566	2	0	3	133	14155	2	0	3	139	14155	2	0	3	139	14008	2	0	3	137	14745	2	0	3	145
			T5	13349	3	0	3	131	13929	3	0	3	137	13929	3	0	3	137	13784	3	0	3	135	14510	3	0	3	142
			T5LG	13487	3	0	3	132	14073	3	0	3	138	14073	3	0	3	138	13926	3	0	3	137	14659	3	0	3	144
			T5W	12822	4	0	4	126	13380	4	0	4	131	13380	4	0	4	131	13240	4	0	4	130	13937	4	0	4	137
			T5WW	12123	4	0	4	119	12650	4	0	4	124	12650	4	0	4	124	12519	4	0	4	123	13178	4	0	4	129
			FN	11424	4	0	1	112	11921	4	0	1	117	11921	4	0	1	117	11797	4	0	1	116	12418	4	0	1	122
			FM	11633	4	0	1	114	12139	4	0	1	119	12139	4	0	1	119	12013	4	0	1	118	12645	4	0	2	124
			FW	13078	3	0	2	128	13647	3	0	2	134	13647	3	0	2	134	13504	3	0	2	133	14215	3	0	2	139
48LD	S	1050 mA (157.2W)	T1	18748	4	0	4	119	19563	4	0	4	124	19563	4	0	4	124	19380	4	0	4	123	20379	4	0	4	130
			T2	18076	3	0	4	115	18862	3	0	4	120	18862	3	0	4	120	18665	3	0	4	119	19648	3	0	4	125
			T3R	18658	3	0	4	119	19469	3	0	4	124	19469	3	0	4	124	19266	3	0	4	123	20280	3	0	4	129
			T3	18410	2	0	3	117	19211	2	0	3	122	19211	2	0	3	122	19011	2	0	3	121	20011	3	0	3	127
			T3W	18625	2	0	3	118	19435	2	0	3	124	19435	2	0	3	124	19232	2	0	3	122	20245	3	0	3	129
			T3LG	18710	3	0	3	119	19523	3	0	3	124	19523	3	0	3	124	19320	3	0	3	123	20337	3	0	3	129
			T4	18406	3	0	3	117	19206	3	0	3	122	19206	3	0	3	122	19006	3	0	3	121	20006	3	0	3	127
			T4A	19400	3	0	2	123	20243	3	0	2	129	20243	3	0	2	129	20032	3	0	2	127	21086	3	0	2	134
			T4LG	18673	4	0	4	119	19485	4	0	4	124	19485	4	0	4	124	19282	4	0	4	123	20297	4	0	4	129
			T4FT	18949	3	0	3	121	19773	3	0	3	126	19773	3	0	3	126	1956									

VBL-2 LED SPECIFICATIONS / Forward Optics																												
Led Count	CONFIG	Current & Watts	Distribution Type	70CRI																								
				27K				30K				35K				40K				50K								
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW					
32LD	D	350 mA (32.9W)	T1	5141	1	0	1	156	5365	1	0	1	163	5365	1	0	1	163	5309	1	0	1	162	5588	1	0	1	170
			T2	4957	2	0	2	151	5172	2	0	2	157	5172	2	0	2	157	5118	2	0	2	156	5388	2	0	2	164
			T3R	5116	3	0	3	156	5339	3	0	3	162	5339	3	0	3	162	5283	3	0	3	161	5561	3	0	3	169
			T3	5048	2	0	2	154	5268	2	0	2	160	5268	2	0	2	160	5213	2	0	2	159	5487	2	0	2	167
			T3W	5107	2	0	2	155	5329	2	0	2	162	5329	2	0	2	162	5274	2	0	2	160	5551	2	0	2	169
			T3LG	5131	2	0	2	156	5354	2	0	2	163	5354	2	0	2	163	5298	2	0	2	161	5577	2	0	2	170
			T4	5047	3	0	1	154	5267	3	0	1	160	5267	3	0	1	160	5212	3	0	1	159	5486	3	0	1	167
			T4A	5320	2	0	1	162	5551	2	0	1	169	5551	2	0	1	169	5493	2	0	1	167	5782	2	0	2	176
			T4LG	5120	2	0	2	156	5343	2	0	2	163	5343	2	0	2	163	5287	2	0	2	161	5566	2	0	2	169
			T4FT	5196	1	0	2	158	5422	1	0	2	165	5422	1	0	2	165	5366	1	0	2	163	5648	1	0	2	172
			T5	5113	2	0	1	156	5335	2	0	1	162	5335	2	0	1	162	5280	2	0	1	161	5558	3	0	1	169
			T5LG	5166	2	0	1	157	5390	2	0	1	164	5390	2	0	1	164	5334	2	0	1	162	5615	2	0	1	171
			T5W	4911	3	0	1	149	5125	3	0	1	156	5125	3	0	1	156	5072	3	0	1	154	5338	3	0	1	162
			T5WW	4644	3	0	1	141	4846	3	0	1	147	4846	3	0	1	147	4795	3	0	1	146	5047	3	0	1	154
			FN	4376	3	0	1	133	4566	3	0	1	139	4566	3	0	1	139	4519	3	0	1	137	4756	3	0	1	145
			FM	4456	3	0	1	136	4650	3	0	1	141	4650	3	0	1	141	4601	3	0	1	140	4843	3	0	1	147
			FW	5009	2	0	1	152	5227	2	0	1	159	5227	2	0	1	159	5173	2	0	1	157	5445	2	0	1	166
32LD	D	530 mA (50.7W)	T1	7609	2	0	2	150	7940	2	0	2	157	7940	2	0	2	157	7857	2	0	2	155	8271	2	0	2	163
			T2	7336	3	0	3	145	7655	3	0	3	151	7655	3	0	3	151	7575	3	0	3	149	7974	3	0	3	157
			T3R	7572	3	0	3	149	7902	3	0	3	156	7902	3	0	3	156	7819	3	0	3	154	8231	3	0	3	162
			T3	7472	3	0	3	147	7797	3	0	3	154	7797	3	0	3	154	7716	3	0	3	152	8122	3	0	3	160
			T3W	7559	3	0	3	149	7888	3	0	3	156	7888	3	0	3	156	7806	3	0	3	154	8216	3	0	3	162
			T3LG	7593	3	0	3	150	7924	3	0	3	156	7924	3	0	3	156	7841	3	0	3	155	8254	3	0	3	163
			T4	7470	3	0	1	147	7795	3	0	1	154	7795	3	0	1	154	7714	3	0	1	152	8120	3	0	2	160
			T4A	7873	2	0	2	155	8216	2	0	2	162	8216	2	0	2	162	8130	2	0	2	160	8558	3	0	2	169
			T4LG	7578	3	0	3	150	7908	3	0	3	156	7908	3	0	3	156	7826	3	0	3	154	8237	3	0	3	163
			T4FT	7691	1	0	2	152	8025	2	0	2	158	8025	2	0	2	158	7941	2	0	2	157	8359	2	0	2	165
			T5	7568	3	0	1	149	7897	3	0	1	156	7897	3	0	1	156	7814	3	0	1	154	8226	3	0	1	162
			T5LG	7646	3	0	1	151	7978	3	0	1	157	7978	3	0	1	157	7895	3	0	1	156	8311	3	0	1	164
			T5W	7269	3	0	2	143	7585	3	0	2	150	7585	3	0	2	150	7506	3	0	2	148	7901	3	0	2	156
			T5WW	6873	3	0	1	136	7172	3	0	2	141	7172	3	0	2	141	7097	3	0	2	140	7470	3	0	2	147
			FN	6477	3	0	1	128	6758	3	0	1	133	6758	3	0	1	133	6688	3	0	1	132	7040	3	0	1	139
			FM	6595	3	0	1	130	6882	3	0	1	136	6882	3	0	1	136	6810	3	0	1	134	7168	3	0	1	141
			FW	7414	2	0	1	146	7736	3	0	1	153	7736	3	0	1	153	7656	3	0	1	151	8059	3	0	1	159
32LD	D	700 mA (67.9W)	T1	9863	2	0	2	145	10292	2	0	2	151	10292	2	0	2	151	10184	2	0	2	150	10720	2	0	2	158
			T2	9509	3	0	3	140	9922	3	0	3	146	9922	3	0	3	146	9819	3	0	3	145	10336	3	0	3	152
			T3R	9815	3	0	3	144	10242	3	0	3	151	10242	3	0	3	151	10135	3	0	3	149	10699	3	0	3	157
			T3	9685	3	0	3	143	10106	3	0	3	149	10106	3	0	3	149	10001	3	0	3	147	10527	3	0	3	155
			T3W	9798	3	0	3	144	10224	3	0	3	150	10224	3	0	3	150	10117	3	0	3	149	10650	3	0	3	157
			T3LG	9842	3	0	3	145	10270	3	0	3	151	10270	3	0	3	151	10163	3	0	3	150	10698	3	0	3	157
			T4	9683	3	0	2	143	10104	3	0	2	149	10104	3	0	2	149	9998	3	0	2	147	10525	3	0	2	155
			T4A	10205	3	0	2	150	10649	3	0	2	157	10649	3	0	2	157	10538	3	0	2	155	11093	3	0	2	163
			T4LG	9823	3	0	3	145	10250	3	0	3	151	10250	3	0	3	151	10143	3	0	3	149	10677	3	0	3	157
			T4FT	9968	2	0	3	147	10402	2	0	3	153	10402	2	0	3	153	10293	2	0	3	152	10835	2	0	3	159
			T5	9809	3	0	2	144	10236	3	0	2	151	10236	3	0	2	151	10129	3	0	2	149	10662	3	0	2	157
			T5LG	9910	3	0	2	146	10341	3	0	2	152	10341	3	0	2	152	10233	3	0	2	151	10772	3	0	2	159
			T5W	9422	3	0	2	139	9832	3	0	2	145	9832	3	0	2	145	9729	3	0	2	143	10241	3	0	2	151
			T5WW	8908	3	0	2	131	9296	3	0	2	137	9296	3	0	2	137	9199	3	0	2	135	9683	3	0	2	143
			FN	8395	4	0	1	124	8760	4	0	1	129	8760	4	0	1	129	8669	4	0	1	128	9125	4	0	1	134
			FM	8548	4	0	1	126	8920	4	0	1	131	8920	4	0	1	131	8827	4	0	1	130	9292	4	0	1	137
			FW	9610	3	0	1	141	10028	3	0	1	148	10028	3	0	1	148	9923	3	0	1	146	10446	3	0	1	154
32LD	D	1050 mA (104.8W)	T1	13777	2	0	2	131	14376	2	0	2	137	14376	2	0	2	137	14226	2	0	2	136	14975	2	0	2	143
			T2	13282	3	0	3	127	13860	3	0	3	132	13860	3	0	3	132	13716	3	0	3	131	14437	3	0	3	138
			T3R	13710	4	0	4	131	14306	4	0	4	137	14306	4	0	4	137	14157	4	0	4	135	14902	4	0	4	142
			T3	13528	3	0	3	129	14116	3	0	3	135	14116	3	0	3	135	13969	3	0	3	133	14705	3	0	3	140
			T3W	13686	3	0	3	131	14281	3	0	3	136	14281	3	0	3	136	14132	3	0	3	135	14876	4	0	4	142
			T3LG	13748	3	0	3	131	14346	3	0	3	137	14346	3	0	3	137	14196	3	0	3	135	14944	3	0	3	143
			T4	13525	4	0	2	129	14113	4	0	2	135	14113	4	0	2	135	13966	4	0	2	133	14701	4	0	2	140
			T4A	14255	3	0	3	136	14875	3	0	3	142	14875	3	0	3	142	14720	3	0	3	140	15495	3	0	3	148
			T4LG	13721	3	0	3	131	14318	3	0	3	137	14318	3	0	3	137	14169	3	0	3	135	14914	3	0	3	142
			T4FT	13924	2	0	3	133	14529	2	0	3	139	14529	2	0	3	139	14378	2	0	3	137	15135	2	0	3	144
			T5	13702	3	0	2	131	1																			

VBL-2 LED SPECIFICATIONS / Forward Optics																												
Led Count	CONFIG	Current & Watts	Distribution Type	70CRI																								
				27K					30K					35K					40K					50K				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
64LD	D	350 mA (85.7W)	T1	10074	2	0	2	153	10512	2	0	2	160	10512	2	0	2	160	10402	2	0	2	158	10950	2	0	2	167
			T2	9712	3	0	3	148	10135	3	0	3	154	10135	3	0	3	154	10029	3	0	3	153	10557	3	0	3	161
			T3R	10025	3	0	3	153	10461	3	0	3	159	10461	3	0	3	159	10352	3	0	3	157	10897	3	0	3	166
			T3	9892	3	0	3	150	10322	3	0	3	157	10322	3	0	3	157	10215	3	0	3	155	10752	3	0	3	164
			T3W	10008	3	0	3	152	10443	3	0	3	159	10443	3	0	3	159	10334	3	0	3	157	10878	3	0	3	165
			T3LG	10053	3	0	3	153	10490	3	0	3	160	10490	3	0	3	160	10381	3	0	3	158	10927	3	0	3	166
			T4	9890	3	0	2	150	10320	3	0	2	157	10320	3	0	2	157	10212	3	0	2	155	10750	3	0	2	164
			T4A	10424	3	0	2	159	10877	3	0	2	165	10877	3	0	2	165	10764	3	0	2	164	11330	3	0	3	172
			T4LG	10033	3	0	3	153	10469	3	0	3	159	10469	3	0	3	159	10360	3	0	3	158	10906	3	0	3	166
			T4FT	10181	3	0	2	155	10624	3	0	2	162	10624	3	0	2	162	10514	3	0	2	160	11067	4	0	2	168
			T5	10019	3	0	2	152	10455	3	0	2	159	10455	3	0	2	159	10346	3	0	2	157	10890	3	0	2	166
			T5LG	10122	3	0	2	154	10562	3	0	2	161	10562	3	0	2	161	10452	3	0	2	159	11002	3	0	2	167
			T5W	9624	3	0	2	146	10042	3	0	2	153	10042	3	0	2	153	9937	3	0	2	151	10460	3	0	2	159
			TSWW	9099	3	0	2	138	9495	3	0	2	144	9495	3	0	2	144	9396	3	0	2	143	9890	3	0	2	150
			FN	8574	4	0	1	130	8947	4	0	1	136	8947	4	0	1	136	8854	4	0	1	135	9320	4	0	1	142
			FM	8731	4	0	1	133	9111	4	0	1	139	9111	4	0	1	139	9016	4	0	1	137	9490	4	0	1	144
			FW	9815	3	0	1	149	10242	3	0	1	156	10242	3	0	1	156	10135	3	0	1	154	10669	3	0	1	162
64LD	D	530 mA (101.4W)	T1	14910	2	0	2	147	15558	3	0	2	153	15558	3	0	2	153	15396	3	0	2	152	16206	3	0	2	160
			T2	14375	3	0	3	142	15000	3	0	3	148	15000	3	0	3	148	14844	3	0	3	146	15625	3	0	3	154
			T3R	14838	4	0	4	146	15483	4	0	4	153	15483	4	0	4	153	15322	4	0	4	151	16128	4	0	4	159
			T3	14641	3	0	3	144	15277	3	0	3	151	15277	3	0	3	151	15118	3	0	3	149	15914	4	0	4	157
			T3W	14812	4	0	4	146	15456	4	0	4	152	15456	4	0	4	152	15295	4	0	4	151	16100	4	0	4	159
			T3LG	14879	3	0	3	147	15526	3	0	3	153	15526	3	0	3	153	15364	3	0	3	152	16173	3	0	3	160
			T4	14637	4	0	2	144	15274	4	0	2	151	15274	4	0	2	151	15115	4	0	2	149	15910	4	0	2	157
			T4A	15427	3	0	3	152	16098	3	0	3	159	16098	3	0	3	159	15931	3	0	3	157	16769	3	0	3	165
			T4LG	14850	3	0	3	146	15495	3	0	3	153	15495	3	0	3	153	15334	3	0	3	151	16141	3	0	3	159
			T4FT	15069	4	0	3	149	15724	4	0	3	155	15724	4	0	3	155	15561	4	0	3	153	16379	4	0	3	162
			T5	14828	4	0	2	146	15473	4	0	2	153	15473	4	0	2	153	15312	4	0	2	151	16118	4	0	2	159
			T5LG	14981	4	0	2	148	15633	4	0	2	154	15633	4	0	2	154	15470	4	0	2	153	16284	4	0	2	161
			T5W	14243	4	0	3	141	14863	4	0	3	147	14863	4	0	3	147	14708	4	0	3	145	15482	4	0	3	153
			TSWW	13467	4	0	2	133	14052	4	0	2	139	14052	4	0	2	139	13906	4	0	2	137	14638	4	0	2	144
			FN	12691	4	0	2	125	13242	4	0	2	131	13242	4	0	2	131	13104	4	0	2	129	13794	4	0	2	136
			FM	12923	4	0	2	127	13484	4	0	2	133	13484	4	0	2	133	13344	4	0	2	132	14046	4	0	2	139
			FW	14527	3	0	2	143	15159	4	0	2	150	15159	4	0	2	150	15001	3	0	2	148	15791	4	0	2	156
64LD	D	700 mA (135.9W)	T1	19325	3	0	3	142	20166	3	0	3	148	20166	3	0	3	148	19956	3	0	3	147	21006	3	0	3	155
			T2	18632	4	0	4	137	19442	4	0	4	143	19442	4	0	4	143	19240	4	0	4	142	20252	4	0	4	149
			T3R	19232	4	0	4	142	20069	4	0	4	148	20069	4	0	4	148	19860	4	0	4	146	20905	4	0	4	154
			T3	18977	4	0	4	140	19802	4	0	4	146	19802	4	0	4	146	19596	4	0	4	144	20627	4	0	4	152
			T3W	19198	4	0	4	141	20033	4	0	4	147	20033	4	0	4	147	19825	4	0	4	146	20868	4	0	4	154
			T3LG	19286	4	0	4	142	20124	4	0	4	148	20124	4	0	4	148	19914	4	0	4	147	20963	4	0	4	154
			T4	18973	4	0	3	140	19797	4	0	3	146	19797	4	0	3	146	19591	4	0	3	144	20622	4	0	3	152
			T4A	19997	4	0	3	147	20866	4	0	3	154	20866	4	0	3	154	20649	4	0	3	152	21736	4	0	3	160
			T4LG	19248	4	0	4	142	20085	4	0	4	148	20085	4	0	4	148	19875	4	0	4	146	20921	4	0	4	154
			T4FT	19532	4	0	3	144	20381	4	0	3	150	20381	4	0	3	150	20169	4	0	3	148	21231	4	0	3	156
			T5	19220	4	0	2	141	20056	4	0	2	148	20056	4	0	2	148	19847	4	0	2	146	20892	4	0	2	154
			T5LG	19418	4	0	3	143	20263	4	0	3	149	20263	4	0	3	149	20052	4	0	3	148	21107	4	0	3	155
			T5W	18462	4	0	3	136	19265	4	0	3	142	19265	4	0	3	142	19064	4	0	3	140	20067	4	0	3	148
			TSWW	17456	4	0	3	128	18214	4	0	3	134	18214	4	0	3	134	18025	4	0	3	133	18973	4	0	3	140
			FN	16449	5	0	2	121	17164	5	0	2	126	17164	5	0	2	126	16986	5	0	2	125	17880	5	0	2	132
			FM	16750	5	0	2	123	17478	5	0	2	129	17478	5	0	2	129	17296	5	0	2	127	18206	5	0	2	134
			FW	18830	4	0	2	139	19649	4	0	2	145	19649	4	0	2	145	19444	4	0	2	143	20467	4	0	2	151
64LD	D	1050 mA (209.6W)	T1	26994	3	0	3	129	28168	3	0	3	134	28168	3	0	3	134	27875	3	0	3	133	29342	3	0	3	140
			T2	26026	4	0	4	124	27158	4	0	4	130	27158	4	0	4	130	26875	4	0	4	128	28289	4	0	4	135
			T3R	26864	5	0	5	128	28032	5	0	5	134	28032	5	0	5	134	27740	5	0	5	132	29200	5	0	5	139
			T3	26506	4	0	4	126	27660	4	0	4	132	27660	4	0	4	132	27372	4	0	4	131	28613	4	0	4	137
			T3W	26817	4	0	4	128	27983	4	0	4	134	27983	4	0	4	134	27691	4	0	4	132	29149	5	0	5	139
			T3LG	26939	4	0	4	129	28110	4	0	4	134	28110	4	0	4	134	27817	4	0	4	133	29281	4	0	4	140
			T4	26501	5	0	3	126	27654	5	0	3	132	27654	5	0	3	132	27366	5	0	3	131	28806	5	0	3	137
			T4A	27932	4	0	3	133	29146	5	0	4	139	29146	5	0	4	139	28843	4	0	4	138	30361	5	0	4	145
			T4LG	26886	4	0	4	128	28055	4	0	4	134	28055	4	0	4	134	27762	4	0	4	132	29224	4	0	4	139
			T4FT	27283	5																							

VBL-2 LED SPECIFICATIONS / Forward Optics																												
Led Count	CONFIG	Current & Watts	Distribution Type	70CRI																								
				27K					30K					35K					40K					50K				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
96LD	D	350 mA (96.6W)	T1	13993	2	0	2	142	14601	2	0	2	148	14601	2	0	2	148	14449	2	0	2	147	15210	2	0	2	154
			T2	13491	3	0	3	137	14078	3	0	3	143	14078	3	0	3	143	13931	3	0	3	141	14664	3	0	3	149
			T3R	13926	4	0	4	141	14531	4	0	4	147	14531	4	0	4	147	14380	4	0	4	146	15136	4	0	4	154
			T3	13741	3	0	3	139	14338	3	0	3	145	14338	3	0	3	145	14189	3	0	3	144	14936	3	0	3	151
			T3W	13901	3	0	3	141	14505	4	0	4	147	14505	4	0	4	147	14354	3	0	3	146	15110	4	0	4	153
			T3LG	13964	3	0	3	142	14571	3	0	3	148	14571	3	0	3	148	14419	3	0	3	146	15178	3	0	3	154
			T4	13737	4	0	2	139	14335	4	0	2	145	14335	4	0	2	145	14185	4	0	2	144	14932	4	0	2	151
			T4A	14479	3	0	3	147	15109	3	0	3	153	15109	3	0	3	153	14951	3	0	3	152	15738	3	0	3	160
			T4LG	13937	3	0	3	141	14543	3	0	3	147	14543	3	0	3	147	14391	3	0	3	146	15148	3	0	3	154
			T4FT	14143	4	0	3	143	14758	4	0	3	150	14758	4	0	3	150	14604	4	0	3	148	15372	4	0	3	156
			T5	13917	4	0	2	141	14522	4	0	2	147	14522	4	0	2	147	14371	4	0	2	146	15127	4	0	2	153
			T5LG	14060	3	0	2	143	14672	4	0	2	149	14672	4	0	2	149	14519	4	0	2	147	15283	4	0	2	155
			T5W	13368	4	0	2	136	13949	4	0	3	141	13949	4	0	3	141	13804	4	0	2	140	14530	4	0	3	147
			T5WW	12639	4	0	2	128	13188	4	0	2	134	13188	4	0	2	134	13051	4	0	2	132	13738	4	0	2	139
			FN	11910	4	0	2	121	12428	4	0	2	126	12428	4	0	2	126	12299	4	0	2	125	12946	4	0	2	131
			FM	12128	4	0	2	123	12655	4	0	2	128	12655	4	0	2	128	12524	4	0	2	127	13183	4	0	2	134
FW	13634	3	0	2	138	14227	3	0	2	144	14227	3	0	2	144	14079	3	0	2	143	14820	3	0	2	150			
96LD	D	530 mA (152.1W)	T1	20710	3	0	3	136	21611	3	0	3	142	21611	3	0	3	142	21386	3	0	3	141	22511	3	0	3	148
			T2	19967	4	0	4	131	20835	4	0	4	137	20835	4	0	4	137	20618	4	0	4	136	21704	4	0	4	143
			T3R	20610	4	0	4	136	21507	4	0	4	141	21507	4	0	4	141	21283	4	0	4	140	22403	4	0	4	147
			T3	20337	4	0	4	134	21221	4	0	4	140	21221	4	0	4	140	21000	4	0	4	138	22105	4	0	4	145
			T3W	20574	4	0	4	135	21469	4	0	4	141	21469	4	0	4	141	21245	4	0	4	140	22363	4	0	4	147
			T3LG	20668	4	0	4	136	21566	4	0	4	142	21566	4	0	4	142	21341	4	0	4	140	22465	4	0	4	148
			T4	20332	4	0	3	134	21216	4	0	3	140	21216	4	0	3	140	20995	4	0	3	138	22100	4	0	3	145
			T4A	21430	4	0	3	141	22361	4	0	3	147	22361	4	0	3	147	22128	4	0	3	146	23293	4	0	3	153
			T4LG	20627	4	0	4	136	21524	4	0	4	142	21524	4	0	4	142	21299	4	0	4	140	22420	4	0	4	147
			T4FT	20932	4	0	3	138	21842	5	0	3	144	21842	5	0	3	144	21614	5	0	3	142	22752	5	0	3	150
			T5	20598	4	0	2	135	21493	4	0	3	141	21493	4	0	3	141	21269	4	0	2	140	22389	4	0	3	147
			T5LG	20810	4	0	3	137	21715	4	0	3	143	21715	4	0	3	143	21488	4	0	3	141	22619	4	0	3	149
			T5W	19785	4	0	3	130	20645	4	0	3	136	20645	4	0	3	136	20430	4	0	3	134	21505	4	0	3	141
			T5WW	18706	4	0	3	123	19520	4	0	3	128	19520	4	0	3	128	19316	4	0	3	127	20333	5	0	3	134
			FN	17628	5	0	2	116	18394	5	0	2	121	18394	5	0	2	121	18203	5	0	2	120	19161	5	0	3	126
			FM	17950	5	0	2	118	18731	5	0	2	123	18731	5	0	2	123	18535	5	0	2	122	19511	5	0	2	128
FW	20179	4	0	2	133	21057	4	0	2	138	21057	4	0	2	138	20837	4	0	2	137	21934	4	0	2	144			
96LD	D	700 mA (203.8W)	T1	26844	3	0	3	132	28011	3	0	3	137	28011	3	0	3	137	27719	3	0	3	136	29178	3	0	3	143
			T2	25881	4	0	4	127	27006	4	0	4	132	27006	4	0	4	132	26725	4	0	4	131	28132	4	0	4	138
			T3R	26715	5	0	5	131	27876	5	0	5	137	27876	5	0	5	137	27586	5	0	5	135	29038	5	0	5	142
			T3	26360	4	0	4	129	27506	4	0	4	135	27506	4	0	4	135	27220	4	0	4	134	28653	4	0	4	141
			T3W	26668	4	0	4	131	27827	4	0	4	137	27827	4	0	4	137	27537	4	0	4	135	28987	5	0	5	142
			T3LG	26789	4	0	4	131	27954	4	0	4	137	27954	4	0	4	137	27662	4	0	4	136	29118	4	0	4	143
			T4	26354	5	0	3	129	27500	5	0	3	135	27500	5	0	3	135	27213	5	0	3	134	28646	5	0	3	141
			T4A	27777	4	0	3	136	28984	5	0	4	142	28984	5	0	4	142	28682	4	0	4	141	30192	5	0	4	148
			T4LG	26736	4	0	4	131	27899	4	0	4	137	27899	4	0	4	137	27608	4	0	4	135	29061	4	0	4	143
			T4FT	27131	5	0	3	133	28311	5	0	3	139	28311	5	0	3	139	28016	5	0	3	137	29491	5	0	3	145
			T5	26698	4	0	3	131	27859	5	0	3	137	27859	5	0	3	137	27569	5	0	3	135	29020	5	0	3	142
			T5LG	26973	4	0	3	132	28146	4	0	3	138	28146	4	0	3	138	27853	4	0	3	137	29319	5	0	3	144
			T5W	25645	5	0	3	126	26760	5	0	3	131	26760	5	0	3	131	26481	5	0	3	130	27875	5	0	3	137
			T5WW	24247	5	0	3	119	25301	5	0	3	124	25301	5	0	3	124	25037	5	0	3	123	26355	5	0	3	129
			FN	22849	5	0	3	112	23842	5	0	3	117	23842	5	0	3	117	23594	5	0	3	116	24836	5	0	3	122
			FM	23266	5	0	3	114	24278	5	0	3	119	24278	5	0	3	119	24025	5	0	3	118	25290	5	0	3	124
FW	26156	5	0	2	128	27293	5	0	2	134	27293	5	0	2	134	27009	5	0	2	133	28430	5	0	3	139			
96LD	D	1050 mA (314.4W)	T1	37497	4	0	4	119	39127	4	0	4	124	39127	4	0	4	124	38719	4	0	4	123	40757	4	0	4	130
			T2	36152	5	0	5	115	37723	5	0	5	120	37723	5	0	5	120	37330	5	0	5	119	39295	5	0	5	125
			T3R	37316	5	0	5	119	38938	5	0	5	124	38938	5	0	5	124	38533	5	0	5	123	40561	5	0	5	129
			T3	36821	5	0	5	117	38422	5	0	5	122	38422	5	0	5	122	38022	5	0	5	121	40023	5	0	5	127
			T3W	37250	5	0	5	118	38870	5	0	5	124	38870	5	0	5	124	38465	5	0	5	122	40489	5	0	5	129
			T3LG	37419	5	0	5	119	39046	5	0	5	124	39046	5	0	5	124	38640	5	0	5	123	40673	5	0	5	129
			T4	36812	5	0	3	117	38412	5	0	4	122	38412	5	0	4	122	38012	5	0	4	121	40013	5	0	4	127
			T4A	38799	5	0	4	123	40486	5	0	4	129	40486	5	0	4	129	40064	5	0	4	127	42173	5	0	4	134
			T4LG	37346	5	0	5	119	38969	5	0	5	124	38969	5	0	5	124	38563	5	0	5	123	40593	5	0	5	129
			T4FT	37898																								